



Foot and Electric Hydraulic Lift Table

- AC and DC power option available.
- 0.25" reinforced steel top and base.
- 2 rigid and 2 swivel 5" diameter steel wheels and 1 floor lock on 20" x 30" and 30" x 30" models.
- 4 swivel 5" diameter steel wheels and 2 floor locks on 30" x 40" models.
  Precision telescoping guide
- tubes.

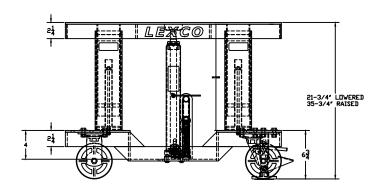



## Specs

•	Capacity:	2000 lbs
•	Table size:	30" x 30"
•	Lowered height:	20"
•	Raised height:	32"
•	Caster:	5 <b>"</b>
•	Lift:	12"
•	Weight(foot opp.):	268 lbs
•	Weight(electric opp.):	348 lbs

THIS DRAW	NG IN ALL	PARTICULARS	IS WESCO	INDUSTRIAL	PRODUCTS	INC. PROPERTY.	ALL RIGHTS	OF DESIGN, INVE	NTION OR USE OF	ARE RESERVED.	
		9		<u>/ECO</u>	<u> </u>	MINITER	DIAI		LICTO	INIC	

DDINT ISSUED		٦٢	\$	İΙ
PRIMI ISSUED		90/	₫	١.
		/21,	퀼ෂ	§
NOV. 21, 2008		11	5 8	S.
PRINT ISSUED  NOV. 21, 2008  WESCO MANUFACTURING ENGINEERING DEPARTMENT		6614	₹ "	<b> </b> "
ENGINEERING DEPARTMENT		<	<u>.</u>	
	·			_

REVISIONS	LANSDALE	PENNA. 19446		
	PART NAME HT-334-2F-A	DRAWN: J.L. 11-21-08		
	HT SERIES, LIFT TABLE	CHECKED:		
	TOLERANCE UNLESS OTHERWISE SPECIFIED	APP. ENGR.		
	FRACTION 3 PLACE DECIMAL 2 PLACE DECIMAL	SCALE: 1" = 1"		
	± 1/84 ± .005 ± .01			
: l	ANGULAR ± 1-1/2' SHEET 1 OF 1	l 492203 l≩l∧ l		
	BREAK ALL SHARP EDGES AND REMOVE ALL BURRS	102200  2 1		