

Aluminum Appliance and Vending Machine Trucks

Wesco Part No. 272410, 272411, 272412



271410

Single Ratchet



271411

Double Ratchet



271412

Vending

SPECIFICATIONS:

Part Number	272410	272411	272412
Model Number	AAP-61	AAP-612	AVT-61
Capacity (lbs.)	550	550	550
Overall W x L x H (in.)	24" x 12" x 61"	24" x 12" x 61"	24" x 12" x 61"
Wheel (in.)	6" x 2"	6" x 2"	6" x 2"
Caster (in.)	2" x 1"	2" x 1"	2" x 1"
Weight (lbs.)	41	43	49

Instructions for use:

1. Slide nose plate under load making sure load is fully seated on plate and against truck frame.
2. Unlock ratchet locking pawl.
3. Pull both ends of belt outward until there is enough to go around cargo
4. Lock belt clasp together on far side of cargo.
5. Place pawl in locked position by pushing lever to the left so that it engages ratchet gear securely. Test by pulling on belt, making sure that it cannot be loosened further.
6. Using ratchet tighten belt to secure load. Be sure that pawl is in locked position so belt remains tight when ratchet handle is released.
7. To release load, pull ratchet to loosen pressure on pawl and unlock pawl. Belt is now free to be loosened.
8. Tilt back truck to balance load. Deploy rear caster assembly by pulling up on side caster carriage release while truck is tilted back. (272412 vending truck only).




Pawl in locked position

Ratchet



Pawl in unlocked position




Closed Belt Clasp



Caster Carriage Release

Replacement Parts

- 052911 Complete ratchet assembly and shaft
- 230050 Locking pawl assembly
- 054041 2-piece cargo belt
- 108227 Vinyl hand grip
- 150119 Wheel
- 151247 Casters - 272412 vending truck only
- 109688 Noseplate rubber padding
- 108464 Rubber padding - 13ft. user cut to size

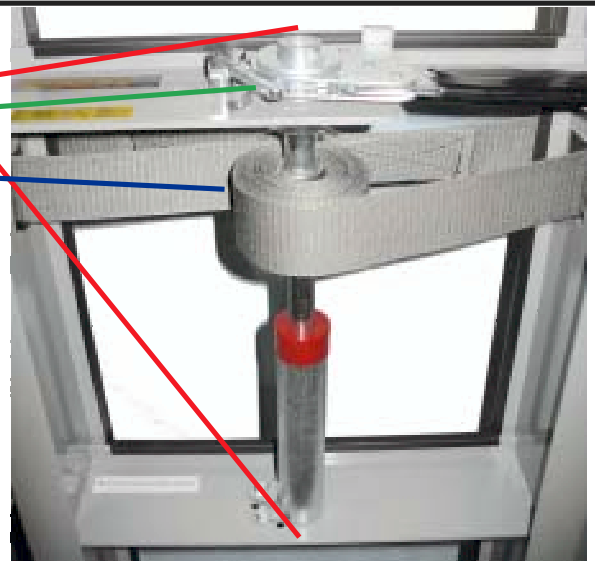

P.O. Box 47, Lansdale, PA 19446-0047
 Phone: 215-699-7031
 Fax: 215-699-3836
<http://www.wescomfg.com>